



SECTION A-A

See Detail

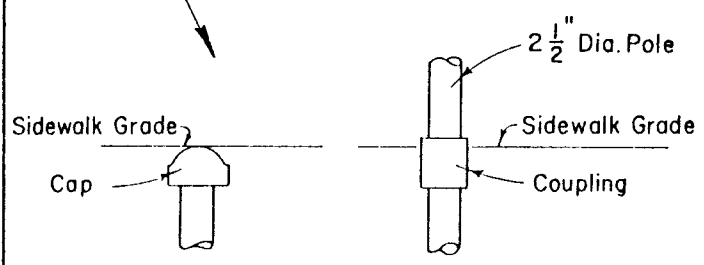

DORMANT **READY**

DETAIL

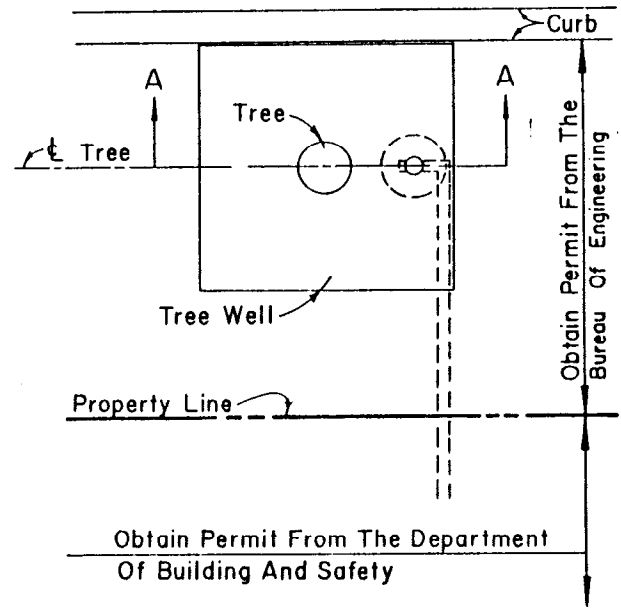

PLAN VIEW

Obtain Permit From The Department Of Building And Safety

- NOTES**
- 1 LOCATION
 - a. Parkway area
At each tree more than 10 feet center to center
 - b. Back of sidewalk
Pole to be within 2 feet and not in sidewalk area
 - c. Any other location must be approved by CITY ENGINEER
 - 2 POLE
 - a. 2 1/2" Diameter pipe and fittings shall be galvanized, standard wt. (sch. 40) steel pipe
 - b. Painted green or brown
 - c. Electrical wires within pipe
 - 3 ELECTRICAL OUTLET BOX
 - a. Lockable, waterproof and galvanized
 - b. 8 feet above sidewalk grade
 - 4 ELECTRICAL CONDUIT
Waterproof with no splicing within public property
 - 5 PULLBOX
Installed flush with sidewalk grade conveniently located adjacent to pole
 - 6 All work shall be constructed in accordance with the latest standard specifications except as otherwise noted hereon
 - 7 Reference to other Standard Plans
B-3674, S-450-0, S-451-0, S-452-0

BUREAU OF ENGINEERING

DEPARTMENT OF PUBLIC WORKS

CITY OF LOS ANGELES

STREET TREE TEMPORARY LIGHTING

**STANDARD PLAN
S-680-0**

SUBMITTED Nov 2, 1971

REVISIONS

REFERENCES

R. Wainor
DIVISION ENGINEER
Julian ...
DEPUTY ENGINEER
APPROVED *David ...*
1971
Wall ...
CITY ENGINEER
DESIGNED BY: P. D. SMITH
DRAWN BY: W. K. QUON
CHECKED BY: S. MITRE

NO.	DATE	DESCRIPTION

DIV. ENGR.	CITY ENGR.

Vault Index Number B-3797
SHEET 1 OF 1 SHEET